ROCHESTER GAUGES, INC.

ISO 9001:2008 CERTIFIED

Cut-Off Lengths For 8341-A7000 Series

DS-1325

8341-A7000 Series Senders ONLY†

NOTE: The given cut-off length will allow a minimum of 1" clearance to the bottom of tank at empty.

TANK DEPTH	DISTANCE FROM END OF WIRE TO FLOAT ROD 90° BEND POINT
4" to 4-1/2"	Order p/n 0020-00588
4-1/2" to 5"	Order p/n 0020-00586
5-1/4" to 5-3/4"	Order p/n 0020-00587
6"	2-5/8" *
6-1/2"	2-5/8"
7"	3-1/8"
7-1/2"	3-5/8"
8"	4-1/8"
8-1/2"	4-5/8"
9"	5-1/4"
9-1/2"	5-3/4"
10"	6-1/4"
10-1/2"	6-3/4"
11"	7-1/4"
11-1/2"	7-7/8"
12"	8-3/8"
12-1/2"	8-7/8"
13"	9-3/8"
13-1/2"	9-7/8"
14"	10-1/2"
14-1/2"	11"
15"	11-1/2"
15-1/2"	12"
16"	12-1/2"
16-1/2"	13"
17"	13-5/8"
17-1/2"	14-1/8"
18"	14-5/8"
18-1/2"	15-1/8"
19"	15-5/8" **
19-1/2"	16-1/8"
20"	16-3/4"
20-1/2"	17-1/4"
21"	17-3/4"
21-1/2"	18-1/4"
22"	18-7/8"
22-1/2"	19-3/8"
23"	19-7/8"
23-1/2"	20-3/8"
24"	21"
24-1/2"	21-1/2"
25"	22" ***

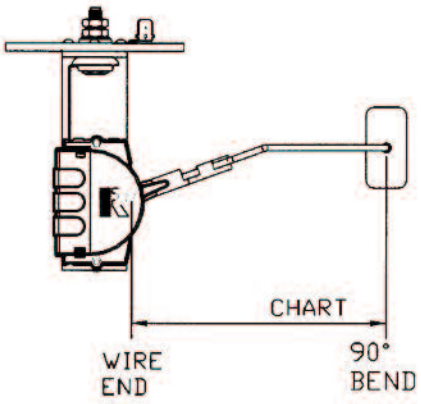

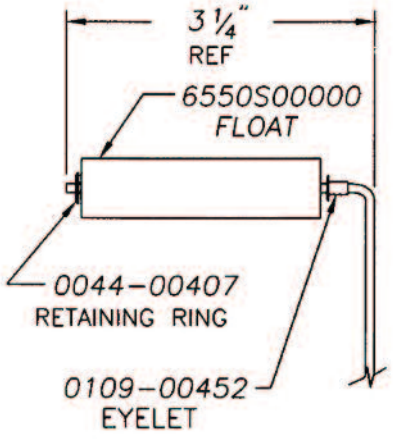

FOR 72.5° FLOAT TRAVEL

***NOTE: 1/2" CLEARANCE @ E**
****NOTE: FLAT FLOAT IS APPROX. 80% SUBMERGED**
*****NOTE: CYLINDRICAL FLOAT IS APPROX. 80% SUBMERGED**

† Materials and specifications subject to change without notice.
Ratings subject to change due to temperature and other environmental considerations.

Cut-Off Lengths For 8341-A7000 Series

05/01/09

ROCHESTER GAUGES, INC.

The Measure of Excellence

11616 Harry Hines Blvd. • P.O. Box 29242 • Dallas, TX 75229 • (972) 241-2161 • *FAX* (972) 620-1403
Website http://www.rochestergauges.com • ***E-mail*** info@rochestergauges.com